


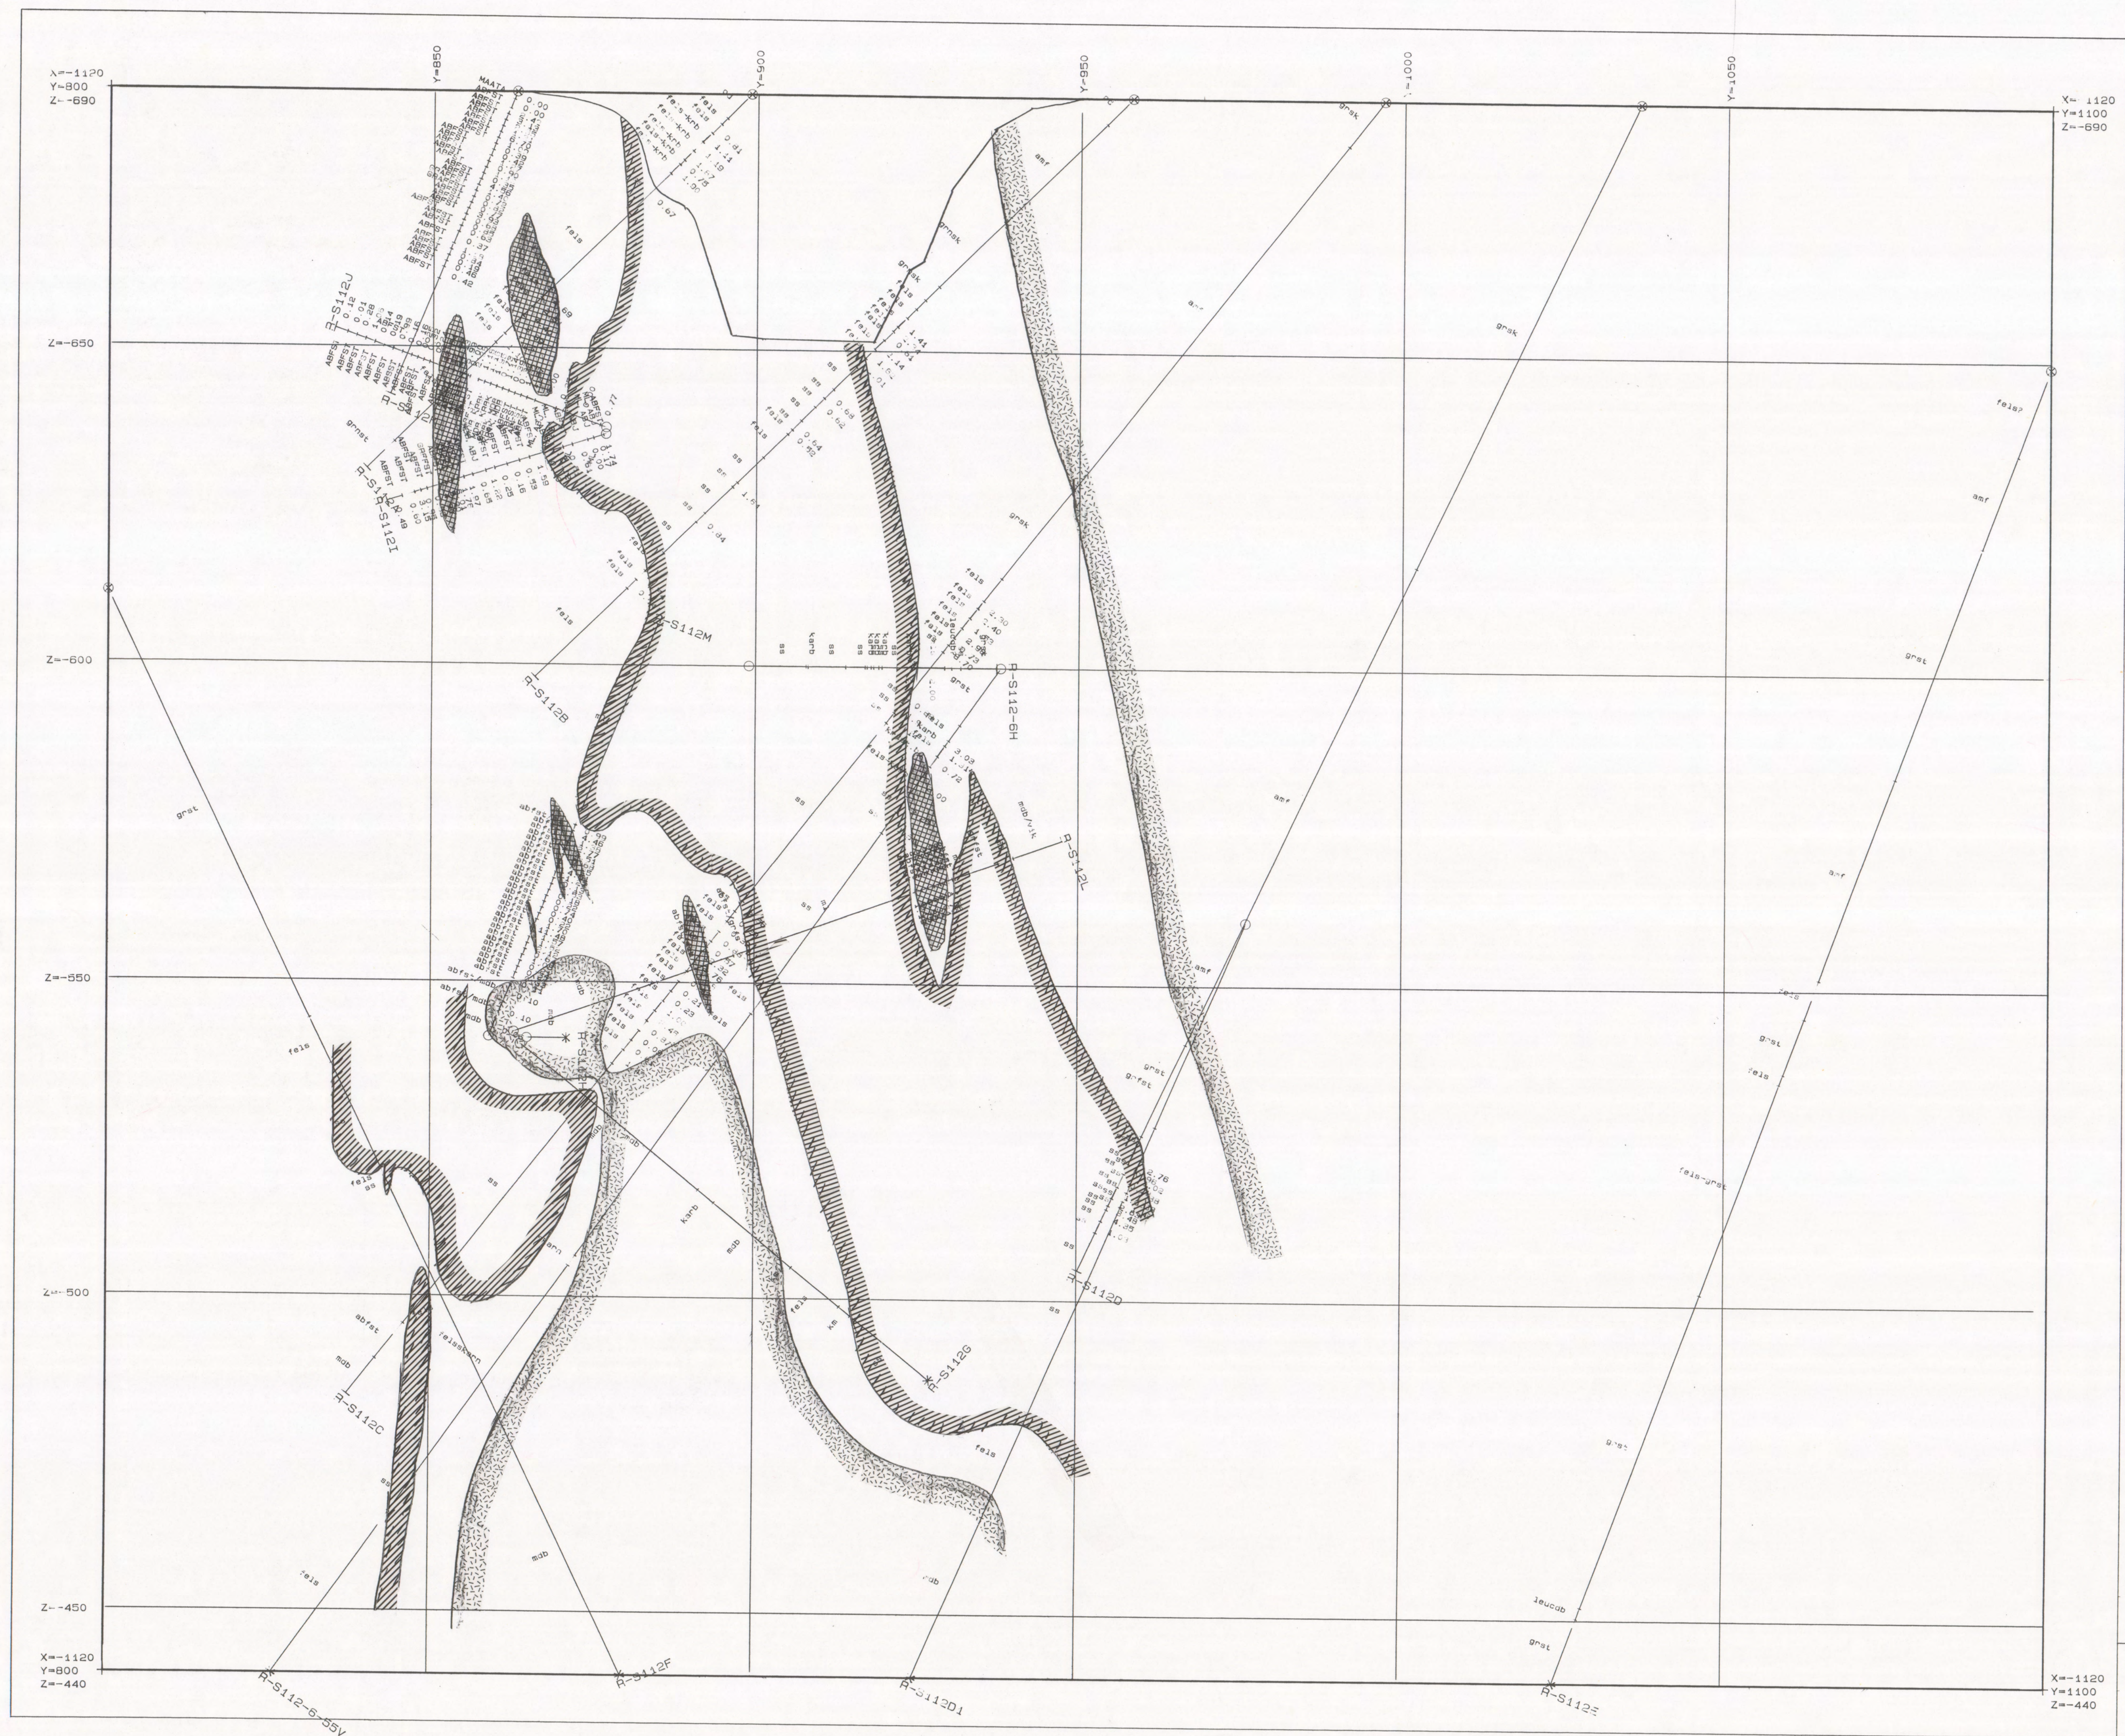

CORE HOLES:

	length	deviations, m	
		start	end
R-S112L	90.00	0.00	0.00
R-S112M	70.20	0.00	0.00
R-S112I	35.44	0.03	0.03
R-S112J	44.50	0.04	0.04
R-S112K	51.50	0.05	0.05
R-S112A	85.00	0.00	0.00
R-S112B	132.90	0.00	0.00
R-S112C	265.50	0.00	0.00
R-S112D	212.61	0.00	0.00
R-S112D1	241.90	0.00	0.00
R-S112E	451.70	0.00	0.00
R-S112F	154.00	0.00	0.00
R-S112-6H	38.40	0.00	0.00
R-S112-6-SSV	253.70	0.00	0.00
R-S112G	115.70	-4.00	+5.00
R-S112H	109.00	0.00	+5.00

DRILL HOLE PARAMETERS:

Analyses: cuau (%)

Content classes (cuau below)

0.5000 - 1.0000	0.5000
1.0000 - 2.5000	1.0000
2.5000 or over	2.5000

Projection distance: front, m 5.00

back, m 5.00

Projection level: direction, gr 100.00

slope, degree 90.00

Projection: direction, gr 200.00

slope, degree 0.00

All the holes intersecting the projection level are drawn

DD SD S P OB AB EX GS CS

A's Bid, ovagge 1: 500

Gruber 30.10.1991

X=-1120