


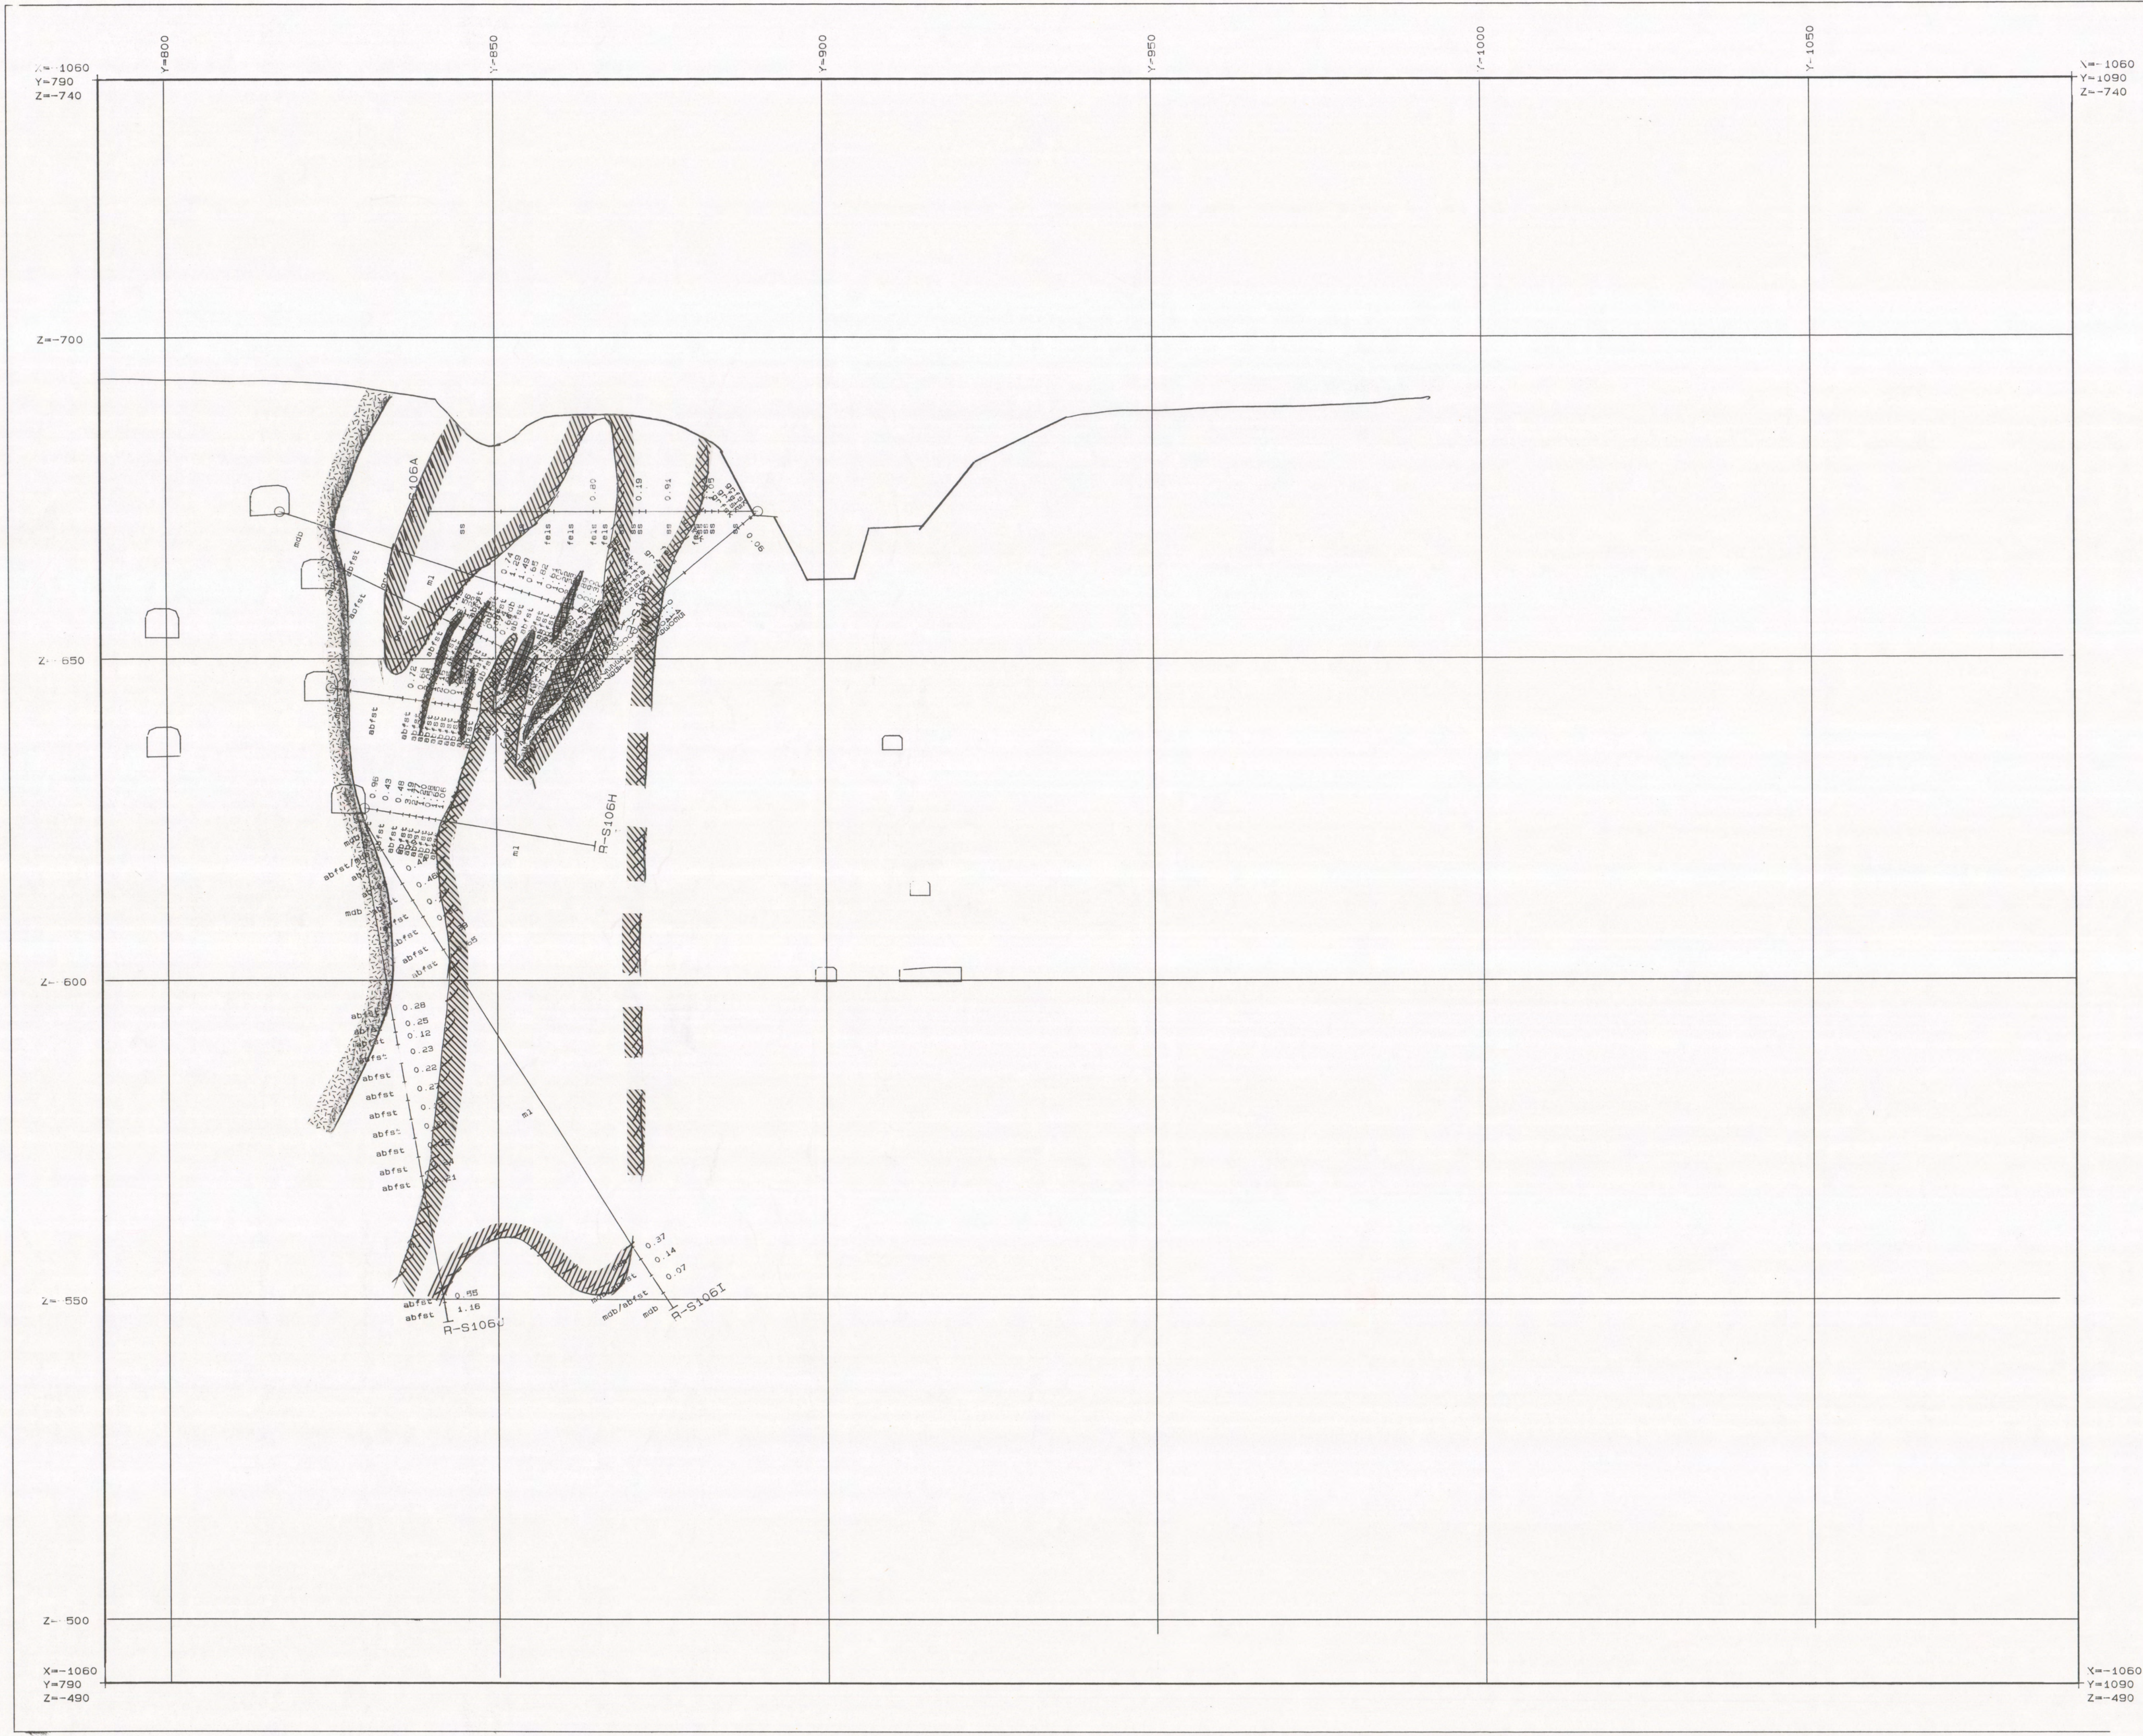

CORE HOLES:			
	length	deviations, m	
		start	end
R-S106J	80.00	-0.20	-0.20
R-S106I	90.00	-0.20	-0.20
R-S106H	35.50	-0.20	-0.20
R-S106D	55.00	0.02	0.02
R-S106E	41.25	0.08	0.08
R-S106F	34.20	0.03	0.03
R-S106A	50.00	0.00	0.00
R-S106B	51.50	+4.00	+4.00

DRILL HOLE PARAMETERS:
Analyses: cuau (%)
Content classes (cuau below) 0.5000
0.5000 - 1.0000
1.0000 - 2.5000
2.5000 or over
Projection distance: front, m 5.00
back, m 5.00
Projection level: direction, gr 100.00
slope, degree 90.00
Projection: direction, gr 200.00
slope, degree 0.00
All the holes intersecting the
projection level are drawn

☒ DD	☐ SD	☐ S	☐ P	☐ OB	☐ RB	☐ EX	☐ GS	☒ CS
A/S Bidjovagge Gruber								1: 500 29.10.1991
X=-1060								